

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number  
**WO 2005/013672 A1**

- (51) International Patent Classification<sup>7</sup>: **A01D 34/416**
- (21) International Application Number:  
PCT/SE2004/001145
- (22) International Filing Date: 21 July 2004 (21.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0302176-3 7 August 2003 (07.08.2003) SE
- (71) Applicant (for all designated States except US): **AK-TIEBOLAGET ELECTROLUX** [SE/SE]; S-105 45 Stockholm (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NYSTRÖM, Marcus** [SE/SE]; Åsavägen 11, S-562 30 Norrahammar (SE).
- (74) Agent: **LILJEGREN, Fredrik**; AB Electrolux, Group Intellectual Property, S-105 45 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EYELET FOR A TRIMMER HEAD

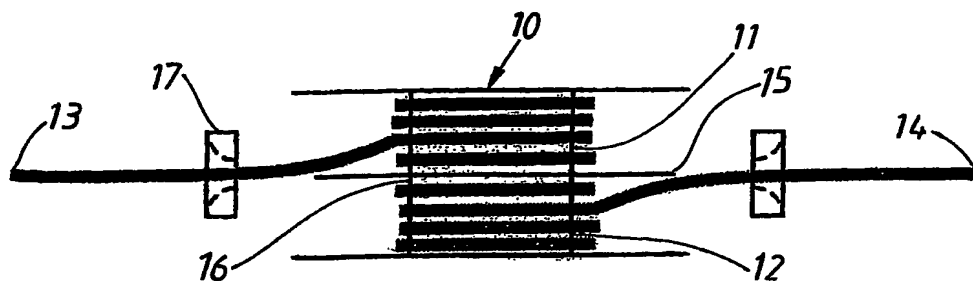

(57) Abstract: Trimmer head comprising at least two eyelets (17) and a bobbin (10) provided with at least two sections (11, 12) for storing of one cutting filaments (13, 14) in each section. The eyelet (17) is placed in a housing surrounding the bobbin (10) and is provided with an opening for the cutting filament (13, 14). The opening is extending in axial direction of the trimmer head so that the opening provides access to all sections (11, 12) for storing of cutting filament (13, 14). One side of the opening has groove shaped so that the cutting filament (13, 14) is placed in the groove when the trimmer head rotates no matter of which section (11, 12) of the bobbin (10) the filament (13, 14) is stored in.

WO 2005/013672 A1